


1000 K



The 1000 K is the traditional cantilever with a payload of 1000 kg (with a 700 mm load centre) designed for heavy duty use. It is extremely robust and dependable for day-to-day use. In short, it's performance rating couldn't be better. Available with both steel and aluminium platforms, it features 4-cylinder technology and is suitable for a wide range of floor heights and ideal for larger vehicles.

Our top-selling tail lift

1000 K

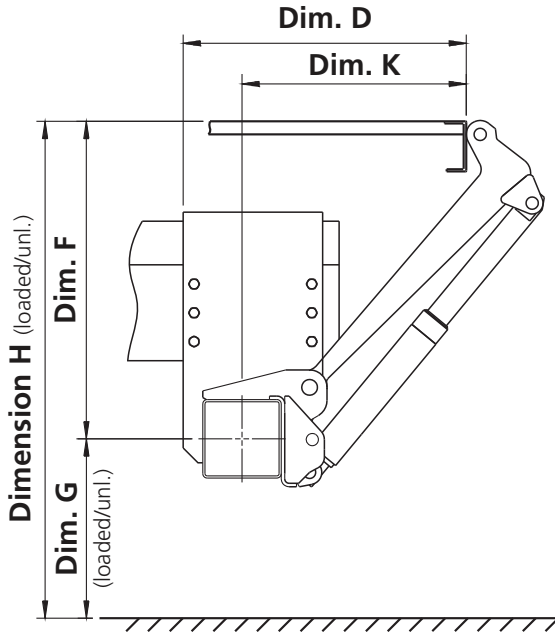

Weights

Platform type	Alum.
Platform width (mm)	2450
Platform height (mm)	2050
	401 kg

Dimensions


		1000 K
Lift arms (in mm)		700
H (max.)	Loading height unloaded	1256
H (min.)	Loading height loaded	906
F (max.)	Middle of main beam to upper edge of loading floor	728
K (min.)	At dimension F (max.)	515
D (min.)	Installation space (min.)	665
F (min.)		529
K (max.)	At dimension F (min.)	710
D (max.)	Installation space (max.)	860

Technical data

		1000 K
Lifting capacity		1000 kg
Main beam		180 x 180 mm
Lifting gear hydraulics		2 x lift cylinder / 2 x tilt cylinder
Platform overlap with floor		- 57 mm
Lift arm pitch		1310 mm
Load centre - lengthwise		700 mm
Load centre - across center		50 % of the full load on one side
Inclination angle of the platform		+90° to -10°

Diagram

a (mm)	Q (kg)
700	1000
875	800
1150	600
1700	400

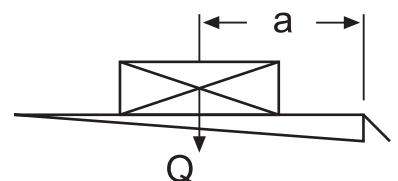

Disclaimer: The specified weights refer to the lightest platforms of the corresponding height. Dimensions may vary. Specifications subject to change without notice.